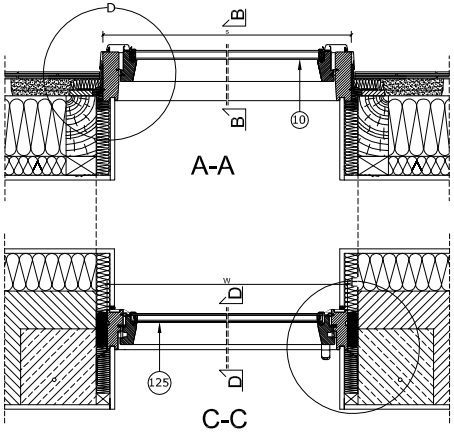

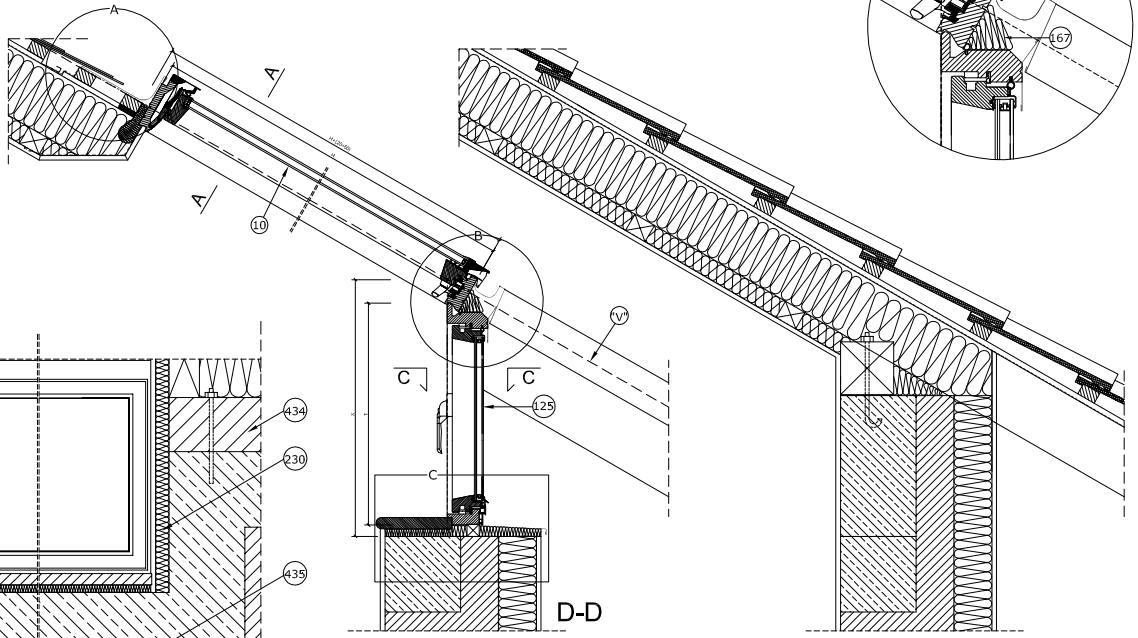

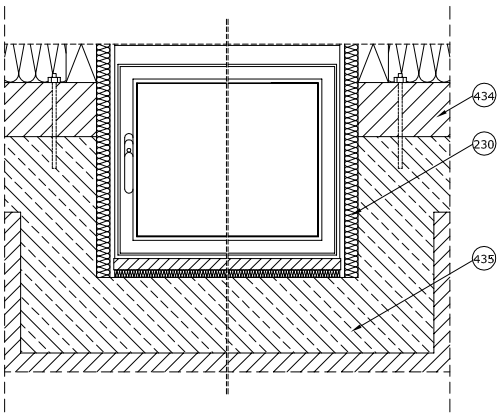









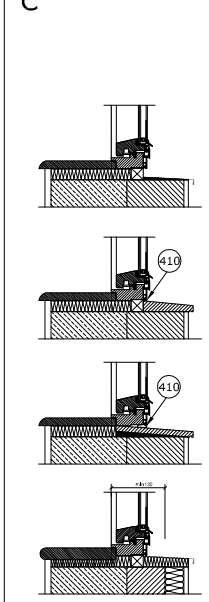

1-Water draining gutter
4-XDP FAKRO vopour permeable collar
5-Tress made of sheep wool FAKRO (XDP)
6-Blocks of sheep wool FAKRO (XDP)
10-FTP-V U3, FTU-V U3 pivot window FAKRO
17-Rafter
38-Installation bracket
40-Horizontal joining gutter
109-XDS air-tight flashing FAKRO
125-BDL L3 L-shaped combination tilt and turn window FAKRO
167-FAKRO Insulation tress
195-EUV/B flashing side element FAKRO
196-EUV/B flashing upper element FAKRO
230-foam polyurethanes low expansion pressure
231-sheet-metal section
297-aluminium masking profile
391-Moving masking profile
410-silicon
434-wall plate
435-reinforced concrete crown

	X
15°	T+85
20°	T+85
25°	T+90
30°	T+95
35°	T+100
40°	T+105
45°	T+110
50°	T+120
55°	T+130

BDL L3

Frame width W[mm]	Frame height T[mm]	Window symbol
636	587	
	737	
	937	
	1137	
	1357	
756	587	33
	737	81
	937	82
	1137	83
	1357	84
916	737	85
	937	86
	1137	87
	1357	88
1116	937	90
	1137	91
	1357	92

FAKRO

FTP-V U3, FTU-V U3 | BDL L3 | EUV-L/B | TILE | 15° - 55°

Vertical and horizontal cross-section:
Standard combination of FTP-V U3, FTU-V U3 pivot window and BDL L3 window with EUV-L/B flashing for flat tiled roofs, combination B1/2

FORMAT: A4

SCALE: 1:20/1:10

DATE: 07.2011

Warning! The present drawing is for informational-demonstrative purposes only and as such cannot constitute a basis for performance. All dimensions presented in this drawing should be verified on site. Because of the fact that the drawing is a schematic one, FAKRO shall not assume any responsibility for the actual installation quality on the roof. This drawing is FAKRO's property and cannot be published or used publicly without our written consent.