
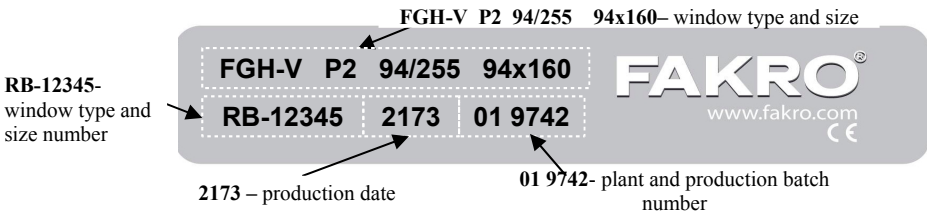
	<b>Declaration of Performance</b>	No. <i>G30/CPR/14351/13</i>	 EN 14351-1	Year of issue <b>11</b>
---	-----------------------------------	--------------------------------	---	----------------------------

1. Window type (number): **FGH-V P2 Galeria (870C), (RB-xxxxxx)**
2. Identification code: **According to number on the window rating plate (positioned on the upper element of the sash) – below the example of the rating plate:**
- 
3. Intended use: **Wooden roof windows intended to be used in domestic and commercial location.**
4. Manufacturer: **FAKRO PP Sp. z o.o.  
Węgierska 144a Street,  
33-300 Nowy Sącz, Poland**
5. Authorised representative: *./.*
6. System of assessment and verification of constancy of performance: **3**
7. Harmonised standard: **EN 14351-1:2006+A1:2010**
8. Notified body: **Centre of Building Construction Engineering (notification No. 1390), performed initial type test in system 3 (included in points 9.1-9.2, 9.5-9.11) and prepared classification report. Building Research Institute (notification No. 1488) – tests in point 9.3.**
9. Declared performance:

Essential characteristics		Performance	Harmonised technical specification	
		FGH-V P2 Galeria		
9.1	Resistance to wind load	Class C4 <sup>(1)</sup>	4.2	EN 14351-1:2006+A1:2010
9.2	Resistance to snow load	4H-14-33.2 <sup>(2)</sup>	4.3	EN 14351-1:2006+A1:2010
9.3	Reaction to fire	D-s2, d2	4.4	EN 14351-1:2006+A1:2010
9.4	External fire performance	npd <sup>(3)</sup>	4.4	EN 14351-1:2006+A1:2010
9.5	Watertightness. Non-shielded (A)	E900	4.5	EN 14351-1:2006+A1:2010
9.6	Impact resistance [mm]	Class 3 - 450mm	4.7	EN 14351-1:2006+A1:2010
9.7	Load-bearing capacity of safety device	Threshold value	4.8	EN 14351-1:2006+A1:2010
9.8	Acoustic performance [dB]	35 (-1;-3)	4.11	EN 14351-1:2006+A1:2010
9.9	Thermal transmittance [W/m <sup>2</sup> K]	1.5	4.12	EN 14351-1:2006+A1:2010
9.10	Radiation properties: - Solar factor g - Light transmittance	0.51 0.69	4.13	EN 14351-1:2006+A1:2010
9.11	Air permeability	Class 3	4.14	EN 14351-1:2006+A1:2010

<sup>(1)</sup> for the windows with the width of > 94 cm and height of > 255 cm: npd, <sup>(2)</sup> H – external pane toughened, <sup>(3)</sup> npd – no performance determined

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed on behalf of the manufacturer by:



Ewa Łukaszczyk-Haslik  
(Certification and Quality Control Director)

Nowy Sącz, 01/07/2013